

# TERMINATION TNC-M REV POLARITY 2W

STT0680

## SPECIFICATIONS


### ELECTRICAL:

FREQUENCY: 0-6 GHz  
VSWR: 1.20:1 MAX @ DC-3 GHz  
1.30:1 MAX @ 3-6 GHz  
POWER (AVG): 2.0 WATT @ 25°C  
DERATED LINERALLY TO 1W AT 125°C  
IMPEDANCE: 50 OHMS  
OP. TEMP RANGE: -55°C to +125°C


### MECHANICAL:

MATERIAL BODY, COUPLING NUT: BRASS/TERNARY ALLOY PLATED  
CENTER CONTACT: GOLD PLATED BeCu  
GASKET: SILICON RUBBER  
INSULTAOR: PTFE

ROHS COMPLIANT

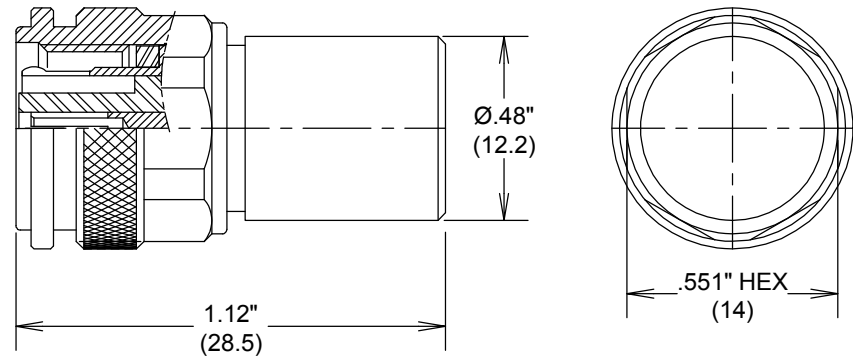

MEASUREMENTS BELOW ARE TYPICAL

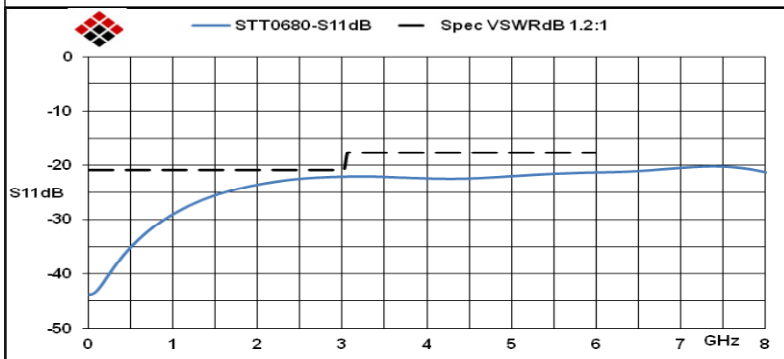

ALL DIMENSIONS IN inches(mm) Typical

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**TERMINATION TNC-M REV POLARITY 2W**

SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	<b>3FKR5</b>	<b>STT0680</b>	--
SCALE	SHEET		