

FMCA1186 DATA SHEET

Test Probe Pigtail SMA Female to Stripped Lead Cable .047 Coax and RoHS Compliant

Fairview's semi-rigid test probes are convenient ready-to-use probes designed for use in testing microwave circuits. These probes are constructed of high quality semi-rigid coax and SMA Female connectors. The assemblies come in multiple cable diameters to help when attaching two very fine traces or into tight spaces. There are two versions including straight-cut probe ends for those that would like to customize the dimensions of the center conductor and dielectric dimensions as well as pre-stripped probe ends that are ready for immediate use. Each assembly has been RF tested to ensure VSWR specifications of the assembly are met prior to trimming. Each assembly comes in special packaging to protect the small diameter coax and pre-trimmed probe ends.

Electrical Specifications

Description	Min	Т	ур	Мах	U	nits
Frequency Range	DC			6		GHz
VSWR				1.35:1		
Operating Voltage (AC)				500	V	'rms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	6				GHz
VSWR (Max.)	1.35:1	1.35:1				

Mechanical Specifications

Cable Assembly

Weight

Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Outer Conductor Material and Plating Outer Conductor Diameter

0.03 lbs [13.61 g]

FM-SR047CUTN 50 Ohms Solid Copper Clad Steel, Silver PTFE 1 Copper, Tin 0.047 in [1.19 mm]

Connectors

Connector 1	Connector 2		
SMA Female	Stripped Lead		
50 Ohms	50 Ohms		
Brass, Gold			
Brass, Gold			
	SMA Female 50 Ohms Brass, Gold		



Configuration:

- SMA Female
- Stripped Lead
- FM-SR047CUTN

Features:

- 100% RF Tested Prior to Final Trim
- 1.35:1 Max VSWR to 6 GHz
- 100% High Pot Tested to 500V
- .047 Diameter Semi-Rigid Coax
- Individually Packed in Protective
 Tube

Applications:

- RF test lead for measurements up to 6GHz
- Testing of individual function or subsection of an RF circuit board
- Inject signals for test and verification

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature Operating Range

+125 deg C

Compliance Certifications (visit www.FairviewMicrowave.com for current document) RoHS Compliant Yes

Plotted and Other Data

Notes:

How to Order

Part Numb	er Configurat	tion:		FMCA1186	-	xx	uu 	cm = Centimeters <blank> = Inches</blank>
Example:	EMC 01186-	12 = 12 inches lon	a cał			I		Length
Example.		100 cm = 100 cm						

Test Probe Pigtail SMA Female to Stripped Lead Cable .047 Coax and RoHS Compliant from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: Test Probe Pigtail SMA Female to Stripped Lead Cable .047 Coax and RoHS Compliant FMCA1186


URL: http://www.fairviewmicrowave.com/test-probe-pigtail-sma-female-stripped-lead-lead-cable-.047-coax-fmca1186-p. aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





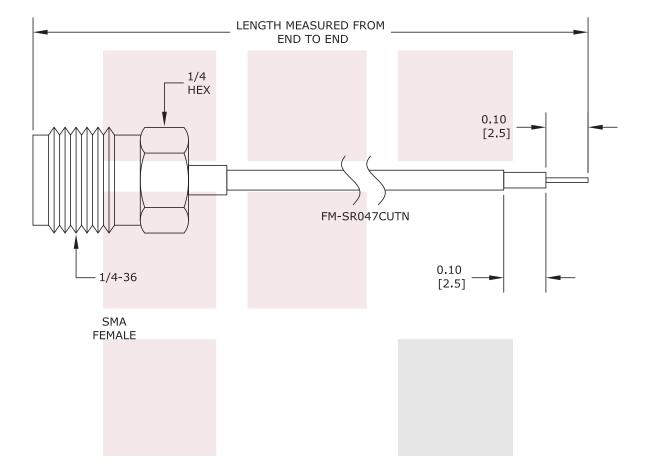

FAIRVIEW MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
TITLE Test Probe Pigtail SMA Female to Stripped Lead Cable	DWG NO FMCA1186				CAGE CODE 3FKR5		
.047 Coax and RoHS Compliant	CAD FILE 011916	SHEET	SCAL	E N/A	SIZE A	2233	

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689