


FDM 3D printer Sunruy SR-D-014

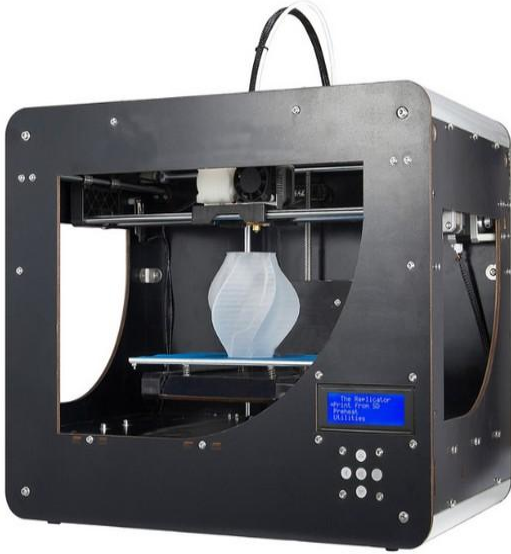

FDM 3d printer

Model: SR-D-014

The total volume of printers : 320*467*381mm

Package Size : 565*430*535mm

Weight (with packaging) : 13.5KG

Build Size : 225*145*150mm

Power : 210V

Build platform's temperature: about 110 (proper winter heating and summer cooling)

Extrusion nozzle flow: about 24cc / h

Supported operating systems: Windows XP Windows7 / 8 (32 bits / 64)

Software:3D printing software

Print materials: ABS, PLA

Layer accuracy: 0.1mm-0.5mm

Positioning accuracy: XY axis 0.011mm

Filament diameter: Z axis 0.0025mm

Nozzle diameter: 0.4mm

Motion axis speed: 30mm/s_100mm/s

Recommended head movement speed : 35-40 mm / s

Input file types: stl, gcode

