



RF Load 2 Watts To 18 GHz Passivated Stainless Steel N Male

RF termination (also called RF load or dummy load) STN1809 from Fairview Microwave operates from DC to 18 GHz and handles up to 2 Watts (CW). This N termination (or load) has a male gender. STN1809 N load termination offers 1.25:1 max VSWR.

RF terminations / loads are critical passive components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can reduce the signal integrity and can potentially damage the device. By terminating an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These radio frequency termination components are commonly used to terminate devices such as couplers, circulators, and switches. Loads / terminations are also widely used in measurement systems to ensure accurate results. Fairview offers a large selection of in-stock RF, microwave and millimeter wave terminations up to 65 GHz with great performance over the entire operating range and with power handling capabilities up to 800 Watts (CW).

Electrical Specifications

| Description | Min | Тур | Max | Units |
|------------------------|-----------|-----|--------|-------|
| Frequency Range | DC | | 18 | GHz |
| Impedance | | 50 | | Ohms |
| VSWR | | | 1.25:1 | |
| Input Power (CW) | | | 2 | Watts |
| derated linearly to 1W | at +125°C | | | |
| Input Power (Peak) | | | 500 | Watts |
| 5µs pulse, 0.05% duty | cycle | | | |

Performance by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------|-----------|-----------|----|----|----|-------|
| Frequency Range | DC - 12.4 | 12.4 - 18 | | | | GHz |
| VSWR, Max | 1.2:1 | 1.25:1 | | | | |

Mechanical Specifications

Size

 Length
 0.96 in [24.38 mm]

 Width
 0.83 in [21.08 mm]

 Weight
 0.08774 lbs [39.8 g]

Configuration

Connector N Male



Features:

- DC to 18 GHz Frequency Range
- VSWR 1.25:1 Max
- Max Power 2 Watts (CW)
- N Male Coaxial Interface

Applications:

- Wireless
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military Communication

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

| Description | Material | Plating |
|---------------------|----------------------------|---------|
| Connector 1 Contact | Beryllium Copper | Gold |
| Body | Passivated Stainless Steel | |
| Housing | Passivated Stainless Steel | |


| Environmental Specifi | cations | | |
|-------------------------------|-------------------------|--------------------|-------------------|
| <u>-</u> | Cations | | |
| Temperature | | | |
| Operating Range | -65 | to +125 deg C | |
| Compliance Certificati | ons (visit www.Fairview | vMicrowave.com for | current document) |
| RoHS Compliant | Yes | | |
| REACH Compliant | 12/ | /17/2015 | |

Plotted and Other Data

Notes:



Typical Performance Data

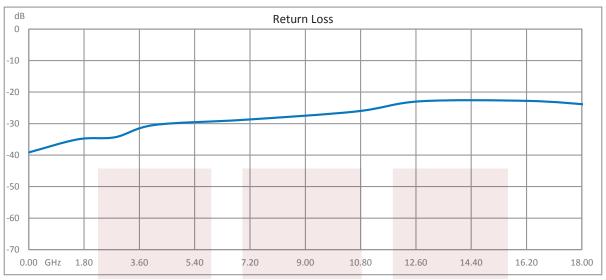

RF Load 2 Watts To 18 GHz Passivated Stainless Steel N Male from Fairview Microwave is in-stock and available to ship sameday. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: RF Load 2 Watts To 18 GHz Passivated Stainless Steel N Male STN1809

URL: https://www.fairviewmicrowave.com/rf-load-2-watts-18-ghz-n-male-stn1809-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





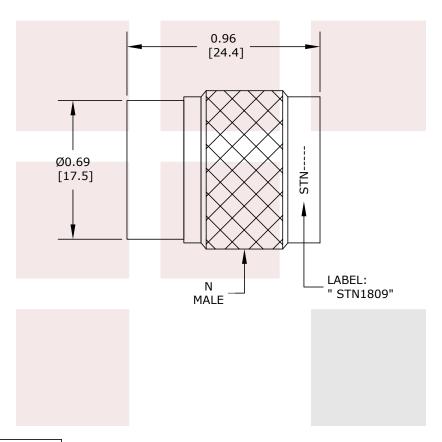

STANDARD TOLERANCES

.X ±0.05 .XX ±0.03 .XXX ±0.010

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | |
|---|---|-------|------|-----------------|--------|------|
| RF Load 2 Watts To 18 GHz Passivated Stainless Steel N Male | DWG NO STN1809 | | | CAGE CODE 3FKR5 | | |
| N Male | CAD FILE 063016 | SHEET | SCAL | E N/A | SIZE A | 3045 |