

Matching Pad 75 Ohm BNC Male To 50 Ohm BNC Female Operating From DC to 2 GHz RoHS Compliant

Fairview Microwave's SI1500 is a 75 ohm BNC male to 50 ohm BNC female matching pad that operates from DC to 2 GHz. This BNC to BNC impedance matching pad offers a VSWR of 1.5:1 max. SI1500 75 ohm to 50 ohm minimum loss pad has a maximum CW power rating of 1 Watt.

Matching pads are used to match the different impedance between two devices, maximizing power transfer between the two impedances. Fairview Microwave's minimum loss impedance matching pads are available in various connector combinations to fit your needs, all of which ship the same day.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		2	GHz
VSWR			1.5:1	
Attenuation		5.7		dB
Input Power, CW			1	Watts

Electrical Specification Notes:
 Values at +25°C, sea level.

Mechanical Specifications

Size

Length	2.093 in [53.16 mm]
Width	0.571 in [14.5 mm]
Weight	0.059 lbs [26.76 g]
Housing Material and Plating	Brass, Tri-Metal

Connector 1

Description	Connector
Type	BNC Male
Impedance	75 Ohms
Inner Conductor Material and Plating	Gold
Dielectric Type	PTFE
Body Material and Plating	Brass, Tri-Metal

Connector 2

Description	Connector
Type	BNC Female
Impedance	50 Ohms
Inner Conductor Material and Plating	Gold
Dielectric Type	PTFE
Body Material and Plating	Brass, Tri-Metal



Configuration:

- Connector 1: 75 Ohms BNC Male
- Connector 2: 50 Ohms BNC Female

Features:

- DC to 2 GHz Frequency Range
- VSWR < 1.5:1
- 1W Max CW Power

Applications:

- CATV / Cable Networks
- Test and Measurement
- Communication Systems
- Wireless Systems


Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

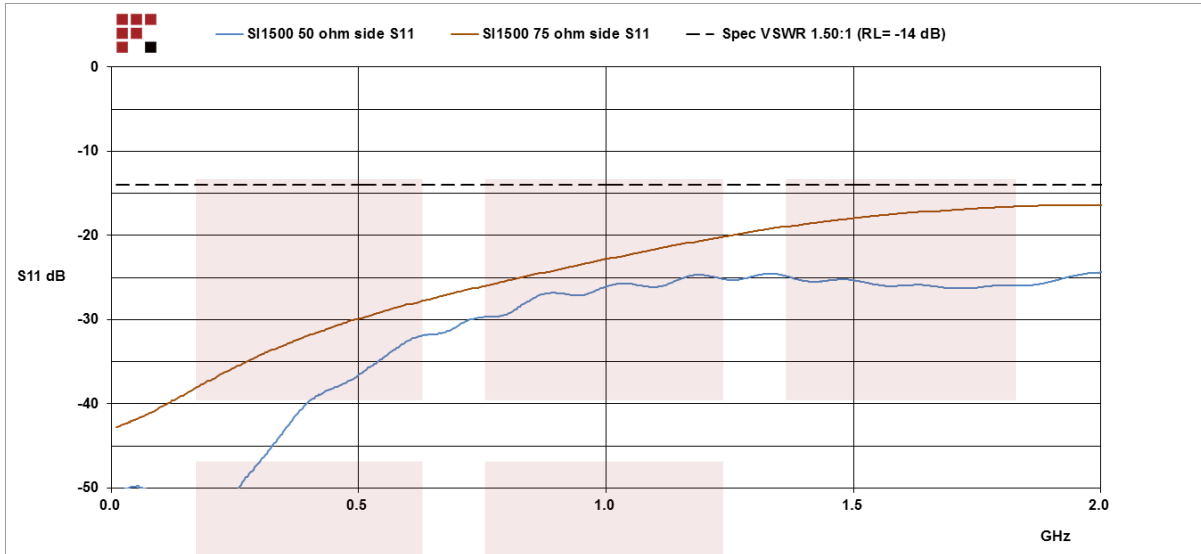


Matching Pad 75 Ohm BNC Male To 50 Ohm BNC Female Operating From DC to 2 GHz RoHS Compliant from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Matching Pad 75 Ohm BNC Male To 50 Ohm BNC Female Operating From DC to 2 GHz RoHS Compliant SI1500](#)

URL: <https://www.fairviewmicrowave.com/matching-pad-75-ohm-bnc-male-50-ohm-bnc-female-2-ghz-si1500-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

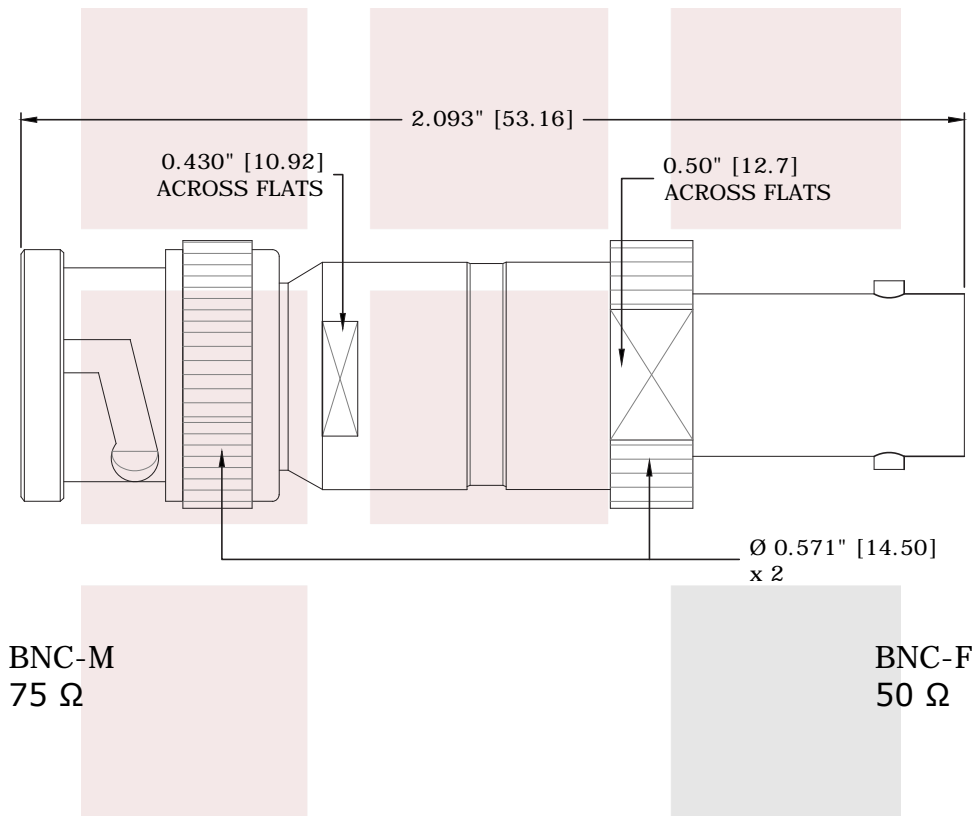

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Matching Pad 75 Ohm BNC Male To 50 Ohm BNC Female Operating From DC to 2 GHz RoHS Compliant		DWG NO SI1500		CAGE CODE 3FKR5	
CAD FILE	101915	SHEET	SCALE	N/A	SIZE A 5568